



1


2019 315RLTS Kitchen Faucet Disassembly

By howson 18 Jul 19

1. Pull out the head and unscrew it from the hose. Don't lose the rubber washer...
2. Pop out the switch cover. Do this by pulling (I used a pair of pliers) up on the rear (see #2 & 3). Then slide it backwards to separate from the actuator. The front of the cap slides under the actuator's head. (See #4)



2

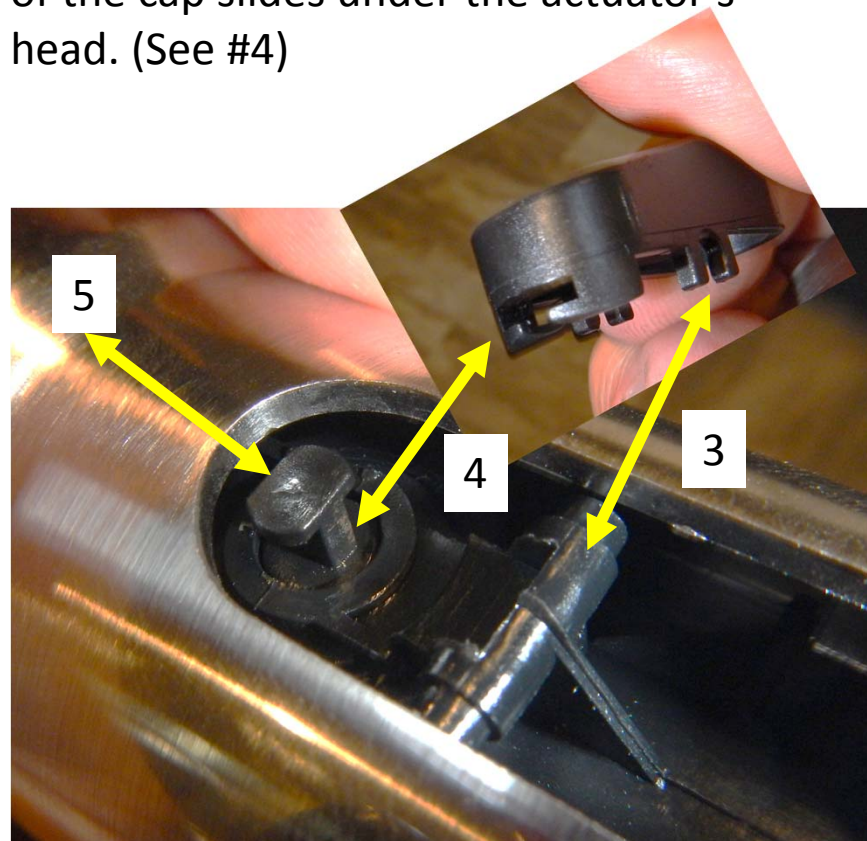



3. Unscrew the barrel nut using the edge of a flat head screwdriver. (pics #6 & #7)
4. Push the mechanism forward out of the chrome barrel. (You may have to push down on the actuator to get it out. See #5 on previous pic.)
5. Unscrew the output filter from the body of the mechanism (pics 8 & 9).



6. Push out the filter by pushing from the outside (and it will pop out the back). Don't lose the rubber gasket.

7. The gray cover on the filter assy snaps off and you'll see a metal screen underneath. (Pic 11 and 12 are what you see in 10 except upside down.)

